

CITY OF REDONDO BEACH More To Sea" BUILDING & SAFETY DEPARTMENT 415 Diamond St Redondo Beach, CA 90277 (310) 318-0636 www.redondo.org

Structural Criteria for Residential Rooftop Solar Energy Installations

1. ROOF CHECKS

A. Visual Review/Contractor's Site Audit of Existing Conditions:			
1) Is the roof a single roof without a reroof overlay?		🗌 Y	🗌 N
2) Does the roof structure appear structurally sound, without signs of	alteration	s	
or significant structural deterioration or sagging, as illustrated in Fig	ure 1?	□ Y	🗆 N
B. Roof Structure Data:			
1) Is roof slope: Flat to 6:12 (0 to 26 degree)?		□ Y	🗆 N
2) Measured rafter size & spacing:	2x	_@	"o.c.
3) Type of roof framing (rafter or manufactured truss):	🗆 Ra	fter	Truss
2. SOLAR ARRAY CHECKS			
A. Flush-mounted Solar Array:			
1) Is the plane of the modules (panels) parallel to the plane of the roo	f?	□ Y	🗌 N
2) Is there a 2" to 10" gap between underside of module and the roof	surface?	<u> </u>	🗆 N
3) Modules do not overhang any roof edges (ridges, hips, gable ends, eaves)?		Y	🗌 N
B. Do the modules plus support components weigh no more than:			
4 psf for photovoltaic arrays or 5 psf for solar thermal arrays?		□ Y	□ N
C. Does the array cover no more than half of the total roof area (all roof	[;] planes)?	□ Y	🗌 N
D. Are solar support component manufacturer's project-specific comple	ted works	sheets,	
tables with relevant cells circled, or web-based calculator results atta	iched?	□ Y	🗌 N
E. Is a roof plan of the module and anchor layout attached? (see Figure 2)		□ Y	□ N
3. DOWNWARD LOAD and WIND UPLIFT CHECKS			
(Anchor Layout & Fastener Checks, see figure 2 & 3)			
A. Is proposed anchor horizontal spacing less than or equal spaces per	figure 2?	Υ 🗌 Υ	🗌 N
B. Are 5/16" diameter lag screws with 2.5" embedment into the rafter us	sed		
at 4 ft. o. c. to 6 ft. o. c.?		□ Y	N
OR does the anchor fastener meet the manufacturer's guidelines?		□ Y	□ N
4. SUMMARY			
A. All items above are checked YES. No additional calculations are req	uired.		
B. One or more items are checked NO. Attach project-specific drawings	and calc	ulation	s stamped
and signed by a California-licensed Civil or Structural Engineer.			
.lob Address: Permit #			

JUD AUUIESS.			
Contractor/Installer:		License # & Class:	
Signature:	Date:	Phone #:	

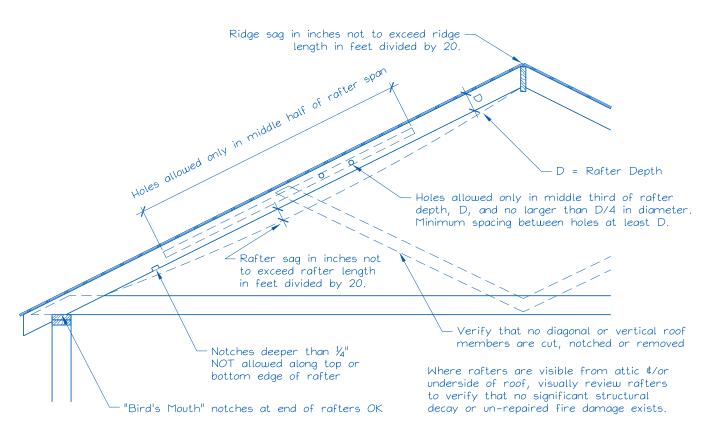


Figure 1. Roof Visual Structural Review of Existing Conditions. (Site Audit)

The site auditor should verify the following:

- 1. No visually apparent disallowed rafter holes, notches and truss modifications as shown above.
- 2. No visually apparent structural decay or un-repaired fire damage.
- 3. Roof sag, measured in inches, is not more than the rafter or ridge beam length in feet divided by 20.

Rafters that fail the above criteria should not be used to support solar arrays unless they are first strengthened.

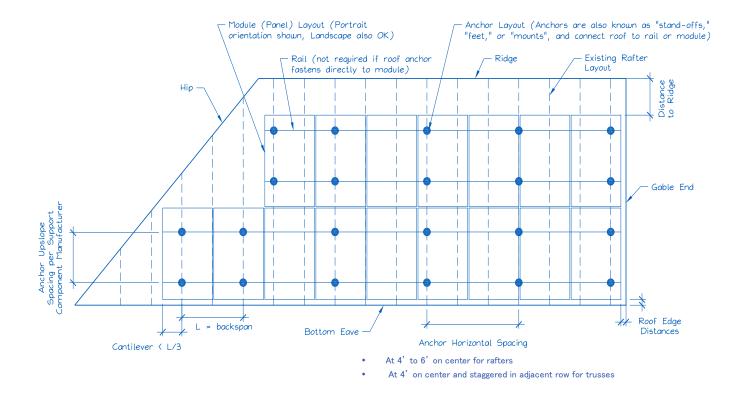


Figure 2. Sample Solar Panel Array and Anchor Layout Diagram (Roof Plan).

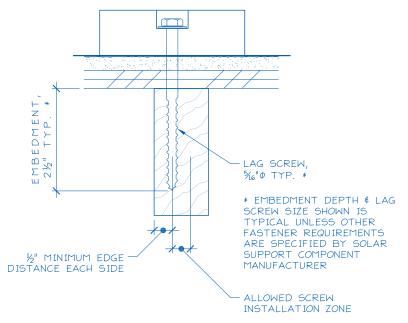


Figure 3. Typical Anchor with Lag Screw Attachment.